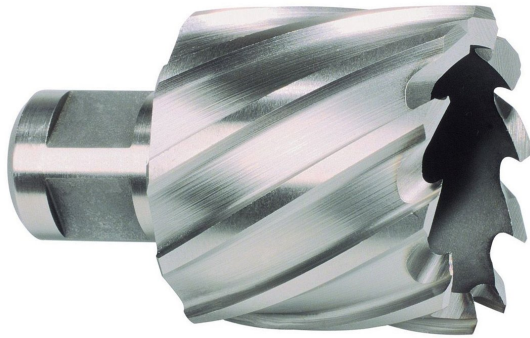


Product sheet

**RUKO HSS hollow drill bit,
Weldon shank 30 mm depth,
diameter 14 mm.**

Brand: Ruko

Reference: TUR 108214

HSS hollow drill bit with Weldon shank and 30 mm depth (Ø 14 mm). Ideal for pillar and bench drills. Designed for drilling steel, light metals, and non-ferrous metals. Presented in a translucent plastic case.

[View product online](#)**Description**

The Ruko-108214 hollow drill bit is a high-precision tool designed to meet the demands of professionals in the metalworking and construction sectors. With a depth of 30 mm and a diameter of 14 mm, this drill bit is manufactured with a polycrystalline cubic boron nitride (CBN) grinding process, guaranteeing high cutting power and exceptional durability. It is ideal for use in magnetic base pillar drills and floor drills with a Morse taper connection, using adapters 108 302 or 108 303. It also allows direct connection to RUKO RS 10 type drills.

This drill bit is especially suitable for drilling steel beams and sheets, cast steel, as well as light and non-ferrous metals, making it a versatile tool for various industrial applications.

- Cutting depth: 30 mm
- Diameter: 14 mm
- Material: Polycrystalline cubic boron nitride (CBN)
- Compatible with magnetic base pillar drills
- Use in floor drills with Morse taper connection
- Required adapters: 108 302/108 303
- Direct connection to RUKO RS 10 type drills
- Ideal for steel, cast steel and non-ferrous metals
- High cutting power
- Presented in a translucent plastic case with hanger

Specifications

High	3,00
Width	3,00

EAN	4007140057723
Manufacturer	Ruko
Weight (kg)	0,0800
Depth	9,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

[If you have any questions, contact our support team](#)

Item downloaded on 15 September 2026