
Product sheet

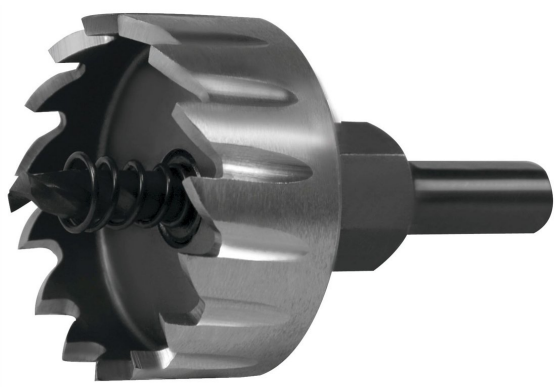

RUKO 17mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128017

The Ruko-128017 HSS-G (Ø 17 mm) core drill is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

View product online

Description

The Ruko-128017-HSS-G (Ø 17 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw offers a right-angle cut and is resharpenable, ensuring a long service life and consistent performance. It is especially recommended for working with alloy steels up to 800 N/mm² hardness, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, plasterboard, and in light construction applications.

For optimal use, it is important to follow certain application guidelines. This tool is not suitable for hammer drilling, and it is recommended to apply light pressure when starting to drill. It is essential to maintain constant pressure and avoid oscillating movements during the process.

Additionally, the use of coolant is suggested to improve performance and extend tool life.

- Diameter: Ø 17 mm
- Material thickness: up to 2.5 mm
- Cutting depth: 5.0 mm
- Right-hand cutting
- Resharpenable
- Recommended for alloy steels (up to 800 N/mm²)
- Compatible with non-ferrous and light metals
- Use on plastics and reinforced fabrics
- Not suitable for hammer drilling
- Requires little pressure to start drilling

Specifications

High	3,00
Width	3,00
EAN	4007140294722
Manufacturer	Ruko
Weight (kg)	0,0600
Depth	12,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 14 November 2026