
Product sheet

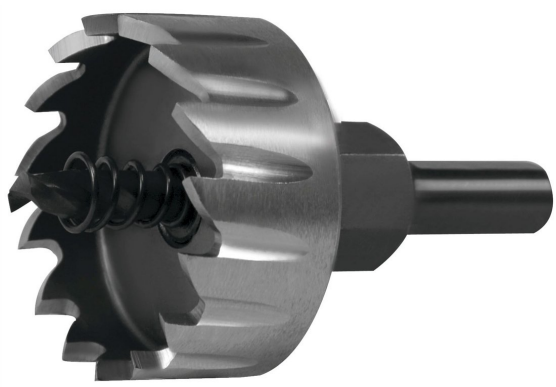

RUKO 24mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128024

The Ruko-128024 HSS-G (Ø 24 mm) core drill is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

View product online

Description

The Ruko-128024-HSS-G (Ø 24 mm) hole saw is a high-precision tool designed to deliver exceptional performance in a variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for jobs requiring clean and efficient cuts. Its right-hand cutting design allows for more effective drilling, while its resharpenable design ensures a long service life and consistent performance.

This tool is especially recommended for drilling alloy steels with hardnesses up to 800 N/mm², as well as cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, plasterboard, and light construction applications.

However, it is important to note that it is not suitable for hammer drilling.

- **Diameter:** 24 mm
- **Material Thickness:** Up to 2.5 mm
- **Cutting Depth:** 5.0 mm
- **Cutting:** Right-handed
- **Resharpenable:** Yes
- **Recommended Materials:** Alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, plasterboard
- **Drilling Pressure:** Low pressure required
- **Movement:** Avoid oscillations
- **Use of Coolants:** Recommended
- **Not suitable for:** Hammer drilling percussion

Specifications

High	4,00
Width	4,00
EAN	4007140294791
Manufacturer	Ruko
Weight (kg)	0,0900
Depth	12,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 11 November 2026