

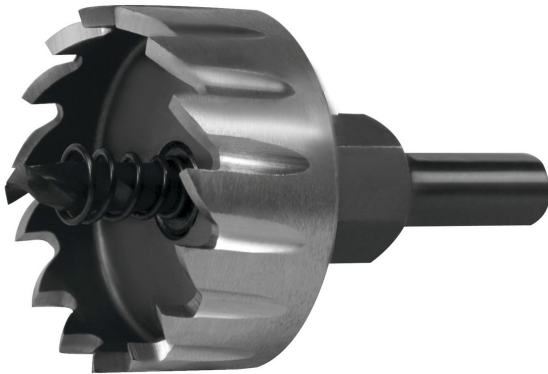
Product sheet

RUKO 28mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128028

The Ruko-128028 HSS-G (Ø 28 mm) hole saw is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

[View product online](#)

Description

The Ruko-128028-HSS-G (Ø 28 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for working with alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, drywall, and light construction materials. Its right-hand cutting design and resharpenable design ensure long-lasting and efficient performance with every use.

It is important to note that this tool is not suitable for hammer drilling. It is recommended to apply light pressure when starting to drill, maintaining constant pressure and avoiding oscillating movements for optimal results.

Furthermore, the use of coolant is advisable to prolong the life of the core bit and improve cut quality.

- Diameter: Ø 28 mm
- Material thickness: up to 2.5 mm
- Cutting depth: 5.0 mm
- Right-hand cutting
- Resharpenable
- Recommended for alloy steels (up to 800 N/mm² hardness)
- Compatible with cast steel and non-ferrous metals
- Ideal for plastics and reinforced fabrics
- Not suitable for hammer drilling
- Use of coolant recommended

Specifications

High	4,00
Width	4,00
EAN	4007140294838
Manufacturer	Ruko
Weight (kg)	0,1100
Depth	12,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 29 September 2026