

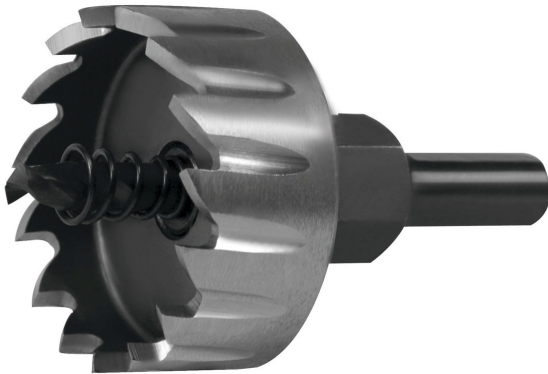
Product sheet

RUKO 55mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128055

The Ruko-128055 HSS-G (Ø 55 mm) core drill is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

[View product online](#)

Description

The Ruko-128055-HSS-G (Ø 55 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for working with alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, drywall, and light construction materials. Its right-hand cutting design allows for efficient performance and a clean finish on every hole.

It is important to note that this tool is not suitable for hammer drilling. It is recommended to apply light pressure when starting to drill and maintain constant pressure throughout the process.

To optimize performance and extend the tool's lifespan, the use of coolant is recommended, and oscillating movements during drilling should be avoided.

- **Diameter:** 55 mm
- **Material Thickness:** Up to 2.5 mm
- **Cutting Depth:** 5.0 mm
- **Cutting:** Right-handed
- **Resharpenable:** Yes
- **Recommended Materials:** Alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, plasterboard
- **Maximum Hardness:** Up to 800 N/mm²
- **Drilling Pressure:** Low and constant
- **Use of Coolant:** Recommended
- **Oscillating movements:** Avoid

Specifications

High	6,00
Width	6,00
EAN	4007140295101
Manufacturer	Ruko
Weight (kg)	0,3100
Depth	12,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 30 September 2026