
Product sheet

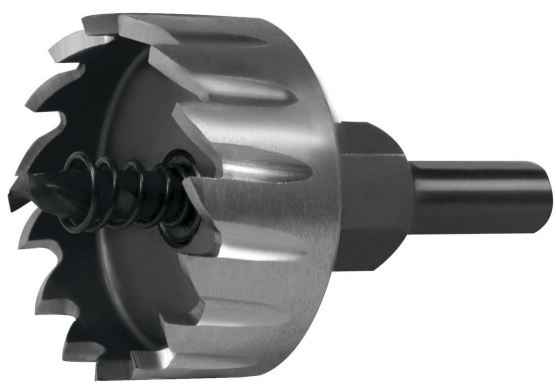

RUKO 59mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128059

The Ruko-128059 HSS-G (Ø 59 mm) hole saw is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

View product online

Description

The Ruko-128059-HSS-G (Ø 59 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for working with alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, drywall, and light construction materials. Its right-hand cutting design allows for optimal performance, and its resharpenable design ensures a long service life and efficiency with every use.

It is important to note that this tool is not suitable for hammer drilling. It is recommended to apply light pressure when starting to drill, maintaining constant pressure and avoiding oscillating movements to achieve optimal results.

Additionally, the use of coolant is suggested to improve performance and extend tool life.

- Diameter: Ø 59 mm
- Material thickness: up to 2.5 mm
- Cutting depth: 5.0 mm
- Right-hand cutting
- Resharpenable
- Recommended for alloy steels (up to 800 N/mm² hardness)
- Suitable for steel casting and non-ferrous metals
- Compatible with plastics and reinforced fabrics
- Not suitable for hammer drilling
- Use of coolant recommended

Specifications

High	7,00
Width	7,00
EAN	4007140295149
Manufacturer	Ruko
Weight (kg)	0,3400
Depth	12,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 12 November 2026