
Product sheet

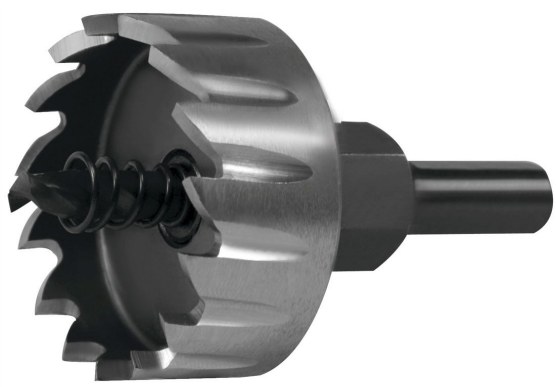

RUKO 75mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128075

The Ruko-128075 HSS-G (Ø 75 mm) core drill is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

View product online

Description

The Ruko-128075-HSS-G (Ø 75 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for working with alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, drywall, and light construction materials. Its right-hand cutting design allows for optimal performance in specific applications, guaranteeing quality results.

It is important to note that this tool is not suitable for hammer drilling. It is recommended to apply light pressure when starting to drill and maintain constant pressure throughout the process.

For optimal performance, it is recommended to avoid oscillating movements and use coolant to help extend the tool's lifespan.

- Diameter: Ø 75 mm
- Material thickness: up to 2.5 mm
- Cutting depth: 5.0 mm
- Right-hand cutting
- Resharpenable
- Recommended for alloy steels (up to 800 N/mm² hardness)
- Compatible with cast steel and non-ferrous metals
- Ideal for plastics and reinforced fabrics
- Not suitable for hammer drilling
- Use of coolant recommended

Specifications

High	10,00
Width	10,00
EAN	4007140295187
Manufacturer	Ruko
Weight (kg)	0,5100
Depth	10,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 11 November 2026