
Product sheet

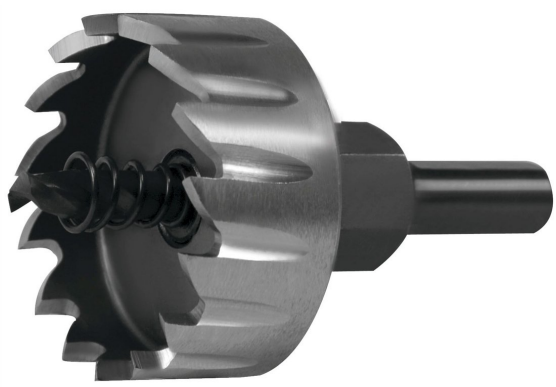

RUKO 95mm diameter high precision HSS-G core drill bit.

Brand: Ruko

Reference: TUR 128095

The Ruko-128095 HSS-G (Ø 95 mm) core drill is ideal for alloy steels, non-ferrous metals, and plastics. With a material thickness of up to 2.5 mm and a cutting depth of 5 mm, it is resharpenable and requires minimal pressure.

View product online

Description

The Ruko-128095-HSS-G (Ø 95 mm) hole saw is a high-precision tool designed for drilling in a wide variety of materials. With a material thickness of up to 2.5 mm and a cutting depth of 5.0 mm, this hole saw is ideal for working with alloy steels, cast steel, non-ferrous metals, light metals, plastics, reinforced fabrics, drywall, and light construction materials. Its right-hand cutting design allows for optimal performance and increased durability, as it is resharpenable, extending its service life and reducing long-term costs.

It is important to note that this tool is not suitable for hammer drilling. It is recommended to apply light pressure when starting to drill and maintain constant pressure throughout the process.

In addition, oscillating movements should be avoided, and coolant should be used to improve drilling performance and quality.

- Diameter: Ø 95 mm
- Material thickness: up to 2.5 mm
- Cutting depth: 5.0 mm
- Right-hand cutting
- Resharpenable
- Recommended for alloy steels (up to 800 N/mm² hardness)
- Suitable for steel castings and non-ferrous metals
- Compatible with plastics and reinforced fabrics
- Not suitable for hammer drilling
- Use of coolant recommended

Specifications

High	10,00
Width	10,00
EAN	4007140295224
Manufacturer	Ruko
Weight (kg)	0,7700
Depth	10,00

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 14 November 2026