


Product sheet

Lifud Adjustable Triac Driver 25-40V DC 20W

Brand: Lifud

Reference: LEDME LF-ACT020D-0550-42

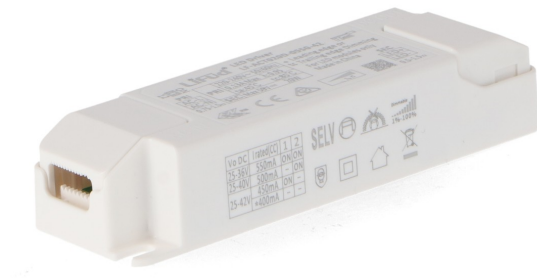

20 W Triac adjustable drive, DC 25-40 V continuous output, 400-550 mA adjustable current. Power supply 220-240 V AC, power factor 0.9. Protection IP20 and 4 kV overvoltage. It works in temperature ranges from -30°C to +50°C. Made of polycarbonate (PC), compact design 122x40x25 mm.

[View product online](#)

Description

Lifud brand Triac adjustable driver, designed to power LED systems with continuous output of 25-40V DC and maximum power of 20W. Compatible with 220-240V AC power voltages, it offers a smooth regulation by controlling Triac without blinking (not flicker). Its compact and robust design, with dimensions of 122x40x25 mm and made of PC material, ensures a stable operation in environments with temperatures between -30°C and +50°C.

Technical characteristics

- Maximum power: 20W
- Power supply: 220-240V AC
- Departure: 25-40V DC
- Current Intensity: 400-550 mA
- Regulatory: Triac
- Power Factor: 0.9
- Protection: IP20
- Overvoltage protection: 4 kV
- Working temperature: -30°C ~ +50°C
- Material: PC
- Dimension: 122x40x25 mm
- Guarantee: 5 years

Specifications

Manufacturer	Lifud
Material	PC
Power (W)	20 W
Protection	IP20
Adjustable	Yes
Nominal voltage (V)	220-240 V
Current type	AC

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 7 October 2026