


Product sheet

Lifud 40W No Flicker DALI Driver 20-42V DC

Brand: Lifud

Reference: LEDME LF-ADD040-1050-42

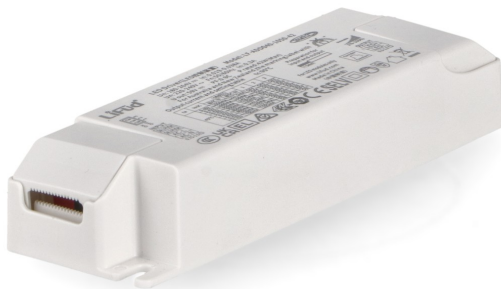

Driver Lifud Dali/ Push with adjustable 9-42V DC output, maximum power of 40W, power factor 0.9. Compatible with Dali systems for lighting control. Power supply 220-240V AC, electric insulation class II, IP20 protection. Operating temperature from -30°C to +50°C. Includes protection against overload and short circuit.

[View product online](#)

Description

Driver Lifud Dali / Push with adjustable 9-42V DC output, maximum power 42W, designed to control LED lighting with DALI protocol. Compatible with intelligent lighting management systems, it allows precise regulation and operation without blinking. Ideal for commercial and residential applications where remote control and energy efficiency are required.

Technical characteristics

- Maximum power: 42W
- Power supply: 220-240V AC
- Exit: 9-42V DC
- Current Intensity: 700-1050 mA
- Regulatory: Dali
- Working temperature: -30°C ~ +50°C
- Protection: IP20
- Class Electrical insulation: II
- Overvoltage protection: 4 kV
- Overload protection: Yes
- Short circuit protection: Yes
- Power Factor: 0.9
- Material: PC
- Dimensions: 142 x 46 x 28 mm

- Guarantee: 5 years

Specifications

Appliance class	Class II
Manufacturer	Lifud
Halogen-free	Yes
Power (W)	42W
Protection	IP20
Adjustable	Yes
Nominal voltage (V)	9-42V
Usage	Indoor

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 8 October 2026