


Product sheet

MCB 1P+N 20A C-curve 2 modules 230V

Brand: LEGRAND

Reference: LEGRAND 449927

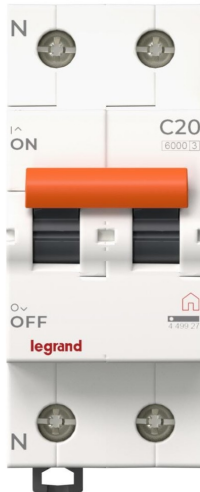

1P+N miniature circuit breaker with 2 modules, designed to protect installations against overloads and short circuits. Operates at 230 V~ with a rated current of 20 A and C tripping curve. Offers a breaking capacity of 6 kA according to EN 60898, an insulation voltage of 500 V, and an impulse withstand voltage of 4 kV.

[View product online](#)**Description**

1P+N miniature circuit breaker designed to protect electrical installations against overloads and short circuits. It also allows for line control and isolation, offering a compact and reliable solution for distribution boards.

Technical features

- Rated current: 20 A
- Rated voltage: 230 V AC
- Tripping curve: C
- Breaking capacity: 6 kA according to EN 60898
- Width: 2 modules
- Depth: 44 mm
- Protection rating: IP20
- Operating temperature: -25...70 °C
- Conductor connection: 1.5...25 mm² (flexible) and 1.5...35 mm² (rigid)
- Current limiting class: 3
- Overvoltage category: 3

This device guarantees a rapid response to electrical faults, protecting connected equipment. Its modular design facilitates integration into standard panels, optimizing the available space in the installation.

Specifications

Rated current (A)	20
Curve	C
EAN	3414972963473
Manufacturer	LEGRAND
Protection	IP20
Rated voltage	230
Nominal voltage (V)	230

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 26 October 2026