


Product sheet

Circuit Breaker 2P 16A C Curve 230V 2 Modules

Brand: LEGRAND

Reference: LEGRAND 449935

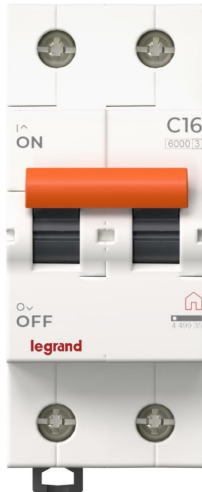

2-pole miniature circuit breaker with a rated current of 16 A and C tripping curve. Designed to protect electrical installations against overloads and short circuits, with a breaking capacity of 10 kA at 230 V. Occupies 2 modules in the distribution board and allows for line control and isolation.

[View product online](#)

Description

2-pole miniature circuit breaker designed to protect electrical installations against overloads and short circuits. It also allows for the control and isolation of the installation. Its compact design occupies 2 modules and is intended for flush mounting.

Technical features

- Rated current: 16 A
- Tripping curve: C
- Nominal voltage: 230V~ / 400V
- Breaking capacity: 10 kA at 230V and 6 kA at 400V (EN 60898)
- Frequency: 50...60 Hz
- Construction depth: 44 mm
- Protection rating: IP20
- Operating temperature: -25...70 °C
- Connection: 1.5...25 mm² (multiple conductors) and 1.5...35 mm² (rigid cable)

This device offers reliable protection in environments with pollution degree 2 and overvoltage category 3. Power loss is 4.4 W, ensuring efficient performance in the circuit.

Specifications

Rated current (A)	16
Curve	C
EAN	3414972963626
Manufacturer	LEGRAND
No. of poles	2P
Power (W)	4.4 W
Protection	IP20

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

[If you have any questions, contact our support team](#)

Item downloaded on 28 October 2026