


Product sheet

**2P 20A C-curve 230V 2-module
MCB**

Brand: LEGRAND

Reference: LEGRAND 449936

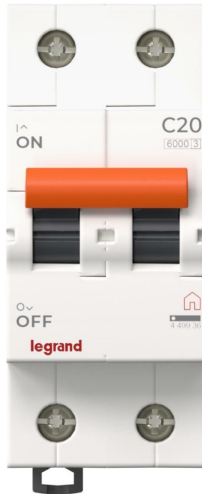

2-pole miniature circuit breaker (MCB) with a rated current of 20 A and C tripping curve. Protects installations against overloads and short circuits, with a breaking capacity of 10 kA at 230 V. Occupies 2 modules, has a depth of 44 mm, and an IP20 protection rating.

[View product online](#)**Description**

2-pole miniature circuit breaker (MCB) designed to protect electrical installations against overloads and short circuits. This device also allows for the control and isolation of the installation when necessary, ensuring circuit safety.

Technical features

- Rated current: 20 A
- Nominal voltage: 230 V AC / 400 V
- Tripping curve: C
- Breaking capacity: 10 kA at 230 V and 6 kA at 400 V (EN 60898)
- Maximum impulse voltage (Uimp): 4 kV
- Insulation voltage (Ui): 500 V
- Frequency: 50...60 Hz
- Current limiting class: 3
- Protection rating: IP20
- Operating temperature: -25...70 °C
- Width: 2 modules
- Depth: 44 mm
- Connection: 1.5...25 mm² (multiple conductors) and 1.5...35 mm² (rigid cable)
- Flush mounting: Yes

This breaker offers reliable protection and easy handling thanks to its compact 2-module design. Its versatile connection capacity allows it to adapt to different types of wiring, while its IP20 protection rating makes it suitable for standard indoor environments.

Specifications

Rated current (A)	20
Curve	C
EAN	3414972963657
Manufacturer	LEGRAND
# Elements	2
No. of poles	2P
Depth	44 mm
Protection	IP20
Rated voltage	230

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 25 October 2026