


Product sheet

Miniature Circuit Breaker 2P 25A C Curve 230V 2 Modules

Brand: LEGRAND

Reference: LEGRAND 449937

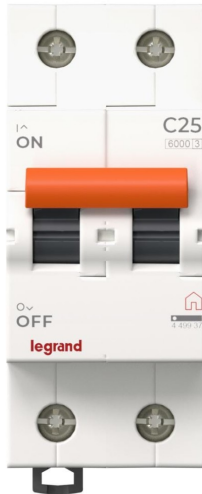

2-pole miniature circuit breaker with a rated current of 25 A and C tripping curve. Protects installations against overloads and short circuits. Features a breaking capacity of 10 kA at 230V and occupies 2 modules. Nominal voltage of 400 V and frequency of 50-60 Hz. Flush-mounted installation with IP20 protection rating.

[View product online](#)

Description

2-pole miniature circuit breaker designed to protect electrical installations against overloads and short circuits. It also allows for the control and isolation of the installation. Its compact design occupies 2 modules and is intended for flush mounting.

Technical features

- Rated current: 25 A
- Tripping curve: C
- Nominal voltage: 230 V~ / 400 V
- Breaking capacity: 10 kA at 230 V and 6 kA at 400 V
- Maximum impulse voltage (Uimp): 4 kV
- Frequency: 50...60 Hz
- Protection rating: IP20
- Operating temperature: -25...70 °C
- Cable cross-section: 1.5...35 mm² (rigid)
- Construction depth: 44 mm

This device offers a rapid response to electrical faults thanks to its C curve and high breaking capacity. The current limiting class 3 helps reduce the thermal and electromagnetic effects of short-circuit currents. Its wide temperature range allows for use in various environmental conditions.

Specifications

Rated current (A)	25
Curve	C
EAN	3414972963688
Manufacturer	LEGRAND
Long	44 mm
No. of poles	2P
Protection	IP20
Cable cross-section (mm²)	35 mm²

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

[If you have any questions, contact our support team](#)

Item downloaded on 31 October 2026