
Product sheet

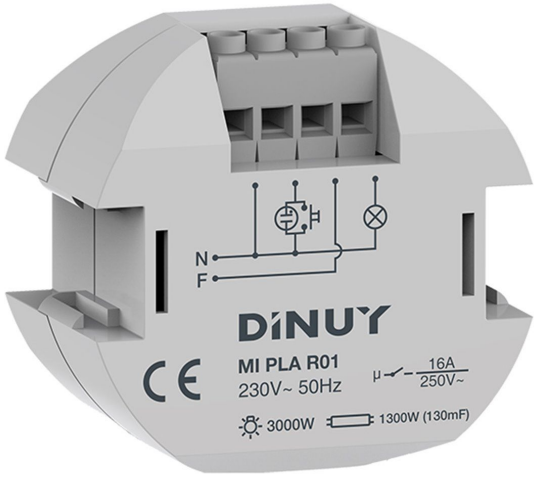

Timer for cash register 3000W

Brand: DINUY

Reference: DINUY MI PLA R01

- Resettable timer or impulse switch.
- Impulse duration: 30sec ~ 10min.
- Mounting inside the register box.
- Power supply: 230V~ 50Hz.
- Breaking capacity: 16A 250V cosφ=1.
- Radio-frequency communication 868.4MHz. Maximum range of 200m in open field.

View product online

Description

Product reference MI PLA R01
Supply voltage (V) 230VAC
Frequency (Hz) 50
Own consumption 40mA
Relay breaking power (A) 16LED lamps (W) 400
Incandescent and Halogen 230V (W) 3000
Halogen 12V with electronic transformer (W) 3000
Halogen with ferromagnetic transformer (W) 2400
Minimum timing (seconds) 30
Maximum timing (minutes) 10
Mounting Registration box
Fluorescent lamps (VA) 1300
Contactor allowed Yes
Zero crossing YesCompatible with Radio-Frequency DINUY
Radio-Frequency 868.3MHz
Maximum range (m) 200
Operating Temperature (ºC) (min) 0
Operating Temperature (ºC) (max) 40
Environmental Protection IP20 according to UNE20324
According to Standard UNE-EN60669-2-1 and UNE-EN60669-2-3

Specifications

EAN	8422447010633
Manufacturer	Dinuy

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

If you have any questions, contact our support team

Item downloaded on 4 November 2026