


Product sheet

Circuit Breaker 4P 63A C Curve 6000A

Brand: LEGRAND

Reference: LEGRAND 403632

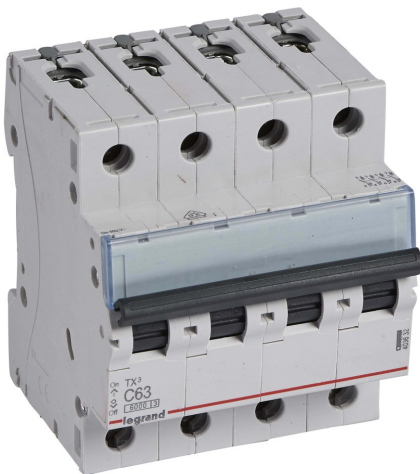

4-pole circuit breaker with a rated current of 63 A and C tripping curve. Protects installations against overloads and short circuits, with a breaking capacity of 10 kA at 230 V and 6 kA at 400 V. Designed for flush mounting, it occupies 4 modules and offers a construction depth of 44 mm.

[View product online](#)

Description

The 6000A TX³ MCB is a 4-pole circuit breaker designed to protect electrical installations against overloads and short circuits. It also allows for the control and isolation of the installation. Its compact design and technical features make it suitable for industrial and commercial applications where reliable and efficient protection is required.

Technical features

- Rated current: 63 A
- Rated voltage: 400 V AC
- Rated insulation voltage: 500 V
- Maximum impulse voltage rating U_{imp}: 4 kV
- Breaking capacity according to EN 60898 at 230V: 10 kA
- Breaking capacity according to EN 60898 at 400V: 6 kA
- Breaking capacity according to EN 60947-2 at 230V: 10 kA
- Breaking capacity according to EN 60947-2 at 400V: 6 kA
- Frequency range: 50...60 Hz
- Current limitation class: 3
- Flush mounting: yes
- Simultaneous N-neutral switching: yes
- Pollution degree: 2
- Possible additional equipment: yes

- Width in modules: 4
- Protection rating (IP): IP20
- Explosion proof: no
- Construction depth: 44 mm
- Tripping curve: C
- Total number of poles: 4
- Number of protected poles: 4

This breaker offers robust and reliable protection, ensuring the safety of electrical installations. Its ability to switch the neutral simultaneously and its compatibility with additional equipment make it versatile for various applications.

Specifications

Rated current (A)	63
Curve	C
EAN	3245064036320
Manufacturer	LEGRAND
Range	Industrial
# Elements	4
No. of poles	4P
Depth	44 mm
Protection	IP20
Rated voltage	400

This document is based on the product page published in our store and is provided for information only. It is not contractual. It may contain errors or omissions and does not replace the manufacturer datasheet.

[If you have any questions, contact our support team](#)

Item downloaded on 25 October 2026